




48 hours  
water  
resistant

water resistant laminate floors

# WAVE herringbone


## Technical data



plank dimensions mm	504 x 84 mm
plank thickness mm	8 mm
bevels	4
loc system	angle-snap loc system
level of use according EN 10874	23 heavy domestic use / 32 general commercial use
composition	top: direct laminated paper, impregnated with melamine resin core: moisture resistant high density fiberboard (HDF), treated with a water repelling coating backing: direct laminated paper, impregnated with melamine resin
1 pack	24 planks - 1,02 m <sup>2</sup> - 7,3 kg
1 pallet	48 packs - 48,77 m <sup>2</sup> - 365 kg
residential warranty	20 years
commercial warranty	3 years

abrasion resistance	ISO 24338 A	AC5 (IP ≥6000)
impact resistance	EN 17368/EN 13329	small ball : ≥ 35 mm - big ball : ≥ 600 mm
thickness swelling	ISO 24336	12% (requirement ≤ 15%)
fire resistance	EN 13501-1	Cfl-S1
formaldehyde emission	EN 717-1	E1
slip resistance	EN 13893	DS
density	EN 323	900 kg/m <sup>3</sup>
resistance to staining	EN 438	5 (group 1+2) ; 4 (group 3)
effect of a furniture leg	EN ISO 16581	no damage (foot type 0)
effect of a castor chair	EN ISO 4918	no damage with type W wheels, 15.000 cycles
thermal resistance	ISO 8302	0,06 m <sup>2</sup> .K/W Suitable for floor heating/cooling. Detailed instructions on <a href="http://www.waterresistantlaminate.org">www.waterresistantlaminate.org</a> .

### What is a laminate floor made of?

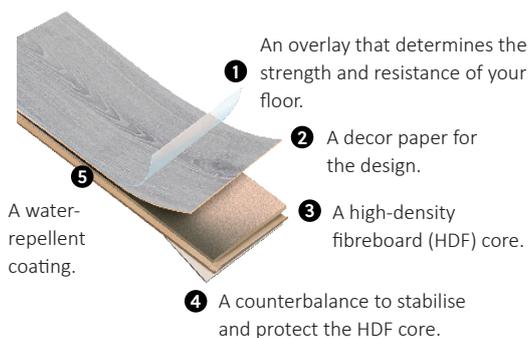

\*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).