

Zenn Glue Down 30.

technical data.

BERRY  ALLOC


	Contains	m ²	Gross Weight (incl. box & pallet)
1 pack Zenn Glue Down 30 planks	24 planks	5,20 m ²	18,96 kg
1 pallet Zenn Glue Down 30 planks	45 packs	234,12 m ²	873,20 kg
1 pack Zenn Glue Down 30 tiles	12 tiles	5,02 m ²	18,52 kg
1 pallet Zenn Glue Down 30 tiles	46 packs	230,77 m ²	871,92 kg


Product specifications	Norm	Zenn Glue Down 30 Planks	Zenn Glue Down 30 Tiles
Dimensions	EN ISO 24342	L 1219,2 x W 177,8 mm	L 914,4 x W 457,2 mm
Wear layer	EN ISO 24340	0,30 mm	0,30 mm
Embossing		wood embossed	stone embossed
Total thickness	EN ISO 24346	2 mm	2 mm
Locking system		no	no
Bevel type		micro V4	micro V4
Usage classification	EN ISO 10582	23/31	23/31
Residential warranty*		15 years	15 years
Commercial warranty*		3 years	3 years

* warranty conditions on www.berryalloc.com

Test results	Norm	Results
Underfloor heating	EN ISO 12524	suitable (detailed instructions on www.berryalloc.com)
Castor chair	EN ISO 4918	pass
Fire resistance	EN 13501-1	Bfl-s1
Chemical resistance	EN ISO 26987	OK
Residual indentation	EN ISO 24343-1	≤ 0,10 mm – pass
Thermal resistance	ISO 8302	0,010 m ² K/W
Slip resistance	DIN 51130	R10
	EN ISO 13893	class DS
Pendulum slip resistance (PTV)	EN 16165	36+
Sound reduction: impact sound	EN ISO 10140-3 EN ISO 717-2	2 dB
Dimensional stability	EN ISO 23999	≤ 0,15 % - pass
Light fastness	EN ISO 105-B02	≥ 6 - pass
Static electrical propensity	EN 1815	antistatic (≤ 2 kV)

vinyl planks & tiles.






Zenn Glue Down 30. technical data.

BERRY  ALLOC

Composition

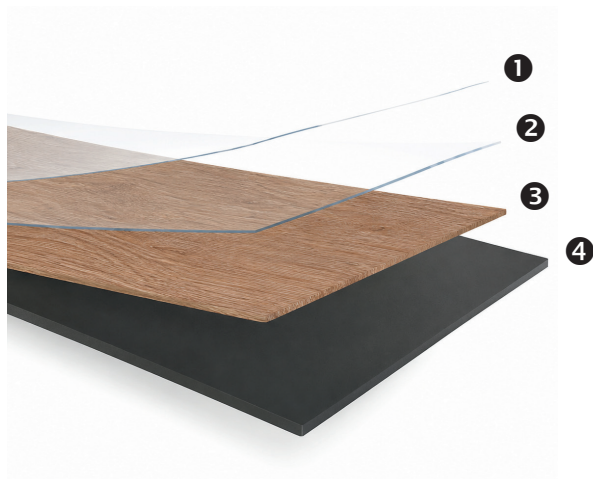

- ❶ Protective PU coating/lacquer
- ❷ Wear layer 0,30 mm
- ❸ Decor layer
- ❹ Backing layer

vinyl planks & tiles.