

RIGID CLICK 55

Technical data

luxury
vinyl flooring

08/2026

	Contains	m ²	Gross Weight
1 pack rigid click 55 planks	7 planks	1,50 m ²	14,79 kg
1 pallet rigid click 55 planks (incl. pallet)	44 packs	65,82 m ²	685,63 kg
1 pack rigid click 55 tiles	4 tiles	1,67 m ²	17,78 kg
1 pallet rigid click 55 tiles (incl. pallet)	50 packs	83,61 m ²	909 kg
1 pack rigid click 55 herringbone	30 planks	1,97 m ²	20,63 kg
1 pallet rigid click 55 herringbone (incl. pallet)	40 packs	78,97 m ²	845,20 kg


Product specifications

	Norm	Rigid Click 55 planks / tiles	Rigid Click 55 herringbone
Dimensions	EN ISO 24342	1210 x 176,6 mm / 914,4 x 457,2 mm	609,6 x 107,95 mm
Thickness of the wear layer	EN ISO 24340	0,55 mm	0,55 mm
Embossing		wood & stone emboss	wood emboss
Total thickness	EN ISO 24346	6 mm (5+1)	6 mm (5+1)
Integrated underlay		yes (1 mm)	yes (1 mm)
Locking system		2G	5G
Bevel type		micro V4	micro V4
Usage classification	EN ISO 16511	23/33	23/33
Residential warranty*		25 years	25 years
Commercial warranty*		5 years	5 years

*warranty conditions on www.luxuryvinylflooring.org

Test results

Underfloor heating	EN ISO 12524	suitable (detailed instructions on www.luxuryvinylflooring.org)	
Castor chair	EN ISO 4918	pass	
Fire resistance	EN ISO 13501-1	Bfl-s1	
Chemical resistance	EN ISO 26987	OK	
Residual indentation	EN ISO 24343-1	≤ 0,10 mm - pass	
Thermal resistance	EN ISO 8302	0,035 m ² K/W	0,030 m ² K/W
Slip resistance	DIN 51130	R10	
	EN ISO 13893	Class DS	
Sound reduction: impact sound	EN ISO 10140-3 EN ISO 717-2	19 dB	
Dimensional stability	EN ISO 23999	≤ 0,15 % - pass	
Lock strength	EN ISO 10582	> 1,5 kN/m - pass	
Light fastness	EN ISO 105-B02	≥ 6 - pass	
Static electrical propensity	EN 1815	antistatic (≤ 2 kV)	




RIGID CLICK 55

Technical data

luxury
vinyl flooring

08/2026

Composition

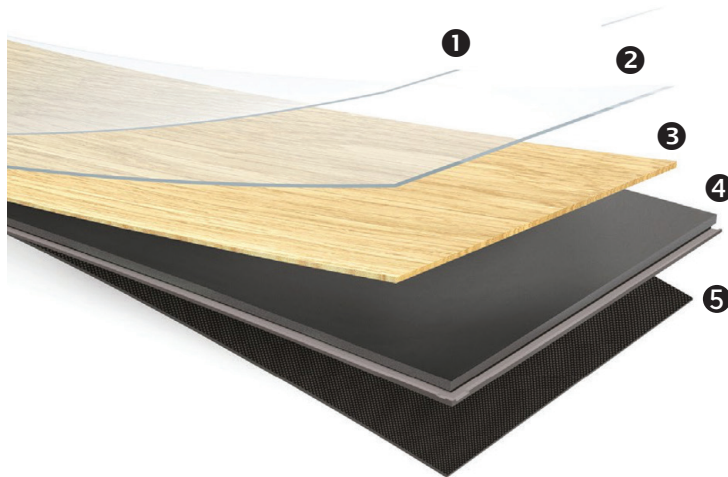

- ❶ Protective PU lacquer
- ❷ Wear layer 0,55 mm
- ❸ Decor layer
- ❹ Rigid board
- ❺ Integrated underlay (1 mm)