

GLUE DOWN 30

Technical data

luxury
vinyl flooring

05/2026

	Contains	m ²	Gross Weight
1 pack glue down 30 planks	15 planks	3,37 m ²	12,34 kg
1 pallet glue down 30 planks (incl. pallet)	95 packs	319,85 m ²	1191 kg
1 pack glue down 30 tiles	12 tiles	5,02 m ²	18,52 kg
1 pallet glue down 30 tiles (incl. pallet)	46 packs	230,77 m ²	871,92 kg


Product specifications

	Norm	Glue Down 30 planks / tiles
Dimensions	EN ISO 24342	1219,2 x 184,1 mm / 914,4 x 457,2 mm
Thickness of the wear layer	EN ISO 24340	0,30 mm
Embossing		wood & stone emboss
Total thickness	EN ISO 24346	2 mm
Locking system		no
Bevel type		micro V4
Usage classification	EN ISO 10582	23/31
Residential warranty*		15 years
Commercial warranty*		3 years

*warranty conditions on www.luxuryvinylflooring.org

Test results

Underfloor heating	EN ISO 12524	suitable (detailed instructions on www.luxuryvinylflooring.org)
Castor chair	EN ISO 4918	pass
Fire resistance	EN ISO 13501-1	Bfl-s1
Chemical resistance	EN ISO 26987	OK
Residual indentation	EN ISO 24343-1	≤ 0,10 mm - pass
Thermal resistance	EN ISO 8302	0,010 m ² K/W
Slip resistance	DIN 51130	R10
	EN ISO 13893	Class DS
Sound reduction: impact sound	EN ISO 10140-3 EN ISO 717-2	2 dB
Dimensional stability	EN ISO 23999	≤ 0,15 % - pass
Light fastness	EN ISO 105-B02	≥ 6 - pass
Static electrical propensity	EN 1815	antistatic (≤ 2 kV)




GLUE DOWN 30

Technical data

luxury
vinyl flooring

05/2026

Composition

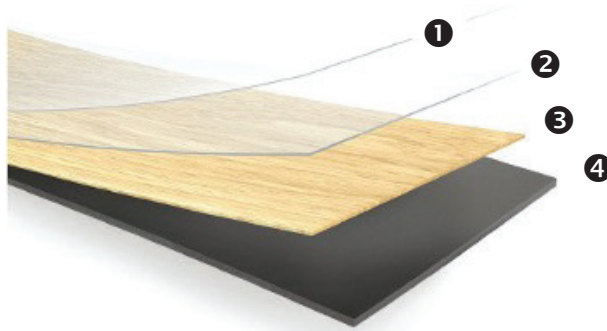

- ❶ Protective PU lacquer
- ❷ Wear layer 0,30 mm
- ❸ Decor layer
- ❹ Backing layer