

GLUE DOWN 55

Technical data

luxury
vinyl flooring

05/2026

	Contains	m ²	Gross Weight
1 pack glue down 55 planks	15 planks	3,37 m ²	15 kg
1 pallet glue down 55 planks (incl. pallet)	44 packs	148,14 m ²	694,82 kg
1 pack glue down 55 tiles	10 tiles	4,18 m ²	18,93 kg
1 pallet glue down 55 tiles (incl. pallet)	46 packs	192,31 m ²	890,78 kg
1 pack glue down 55 herringbone	64 planks	4,46 m ²	19,86 kg
1 pallet glue down 55 herringbone (incl. pallet)	42 packs	187,29 m ²	854,12 kg


Product specifications

	Norm	Glue Down 55 planks / tiles	Glue Down 55 herringbone
Dimensions	EN ISO 24342	1219,2 x 184,1 mm / 914,4 x 457,2 mm	609,6 x 114,3 mm
Thickness of the wear layer	EN ISO 24340	0,55 mm	0,55 mm
Embossing		wood & stone emboss	wood emboss
Total thickness	EN ISO 24346	2,5 mm	2,5 mm
Locking system		no	no
Bevel type		micro V4	micro V4
Usage classification	EN ISO 10582	23/33/42	23/33/42
Residential warranty*		25 years	25 years
Commercial warranty*		5 years	5 years

*warranty conditions on www.luxuryvinylflooring.org

Test results

Underfloor heating	EN ISO 12524	suitable (detailed instructions on www.luxuryvinylflooring.org)	
Castor chair	EN ISO 4918	pass	
Fire resistance	EN ISO 13501-1	Bfl-s1	
Chemical resistance	EN ISO 26987	OK	
Residual indentation	EN ISO 24343-1	≤ 0,10 mm - pass	
Thermal resistance	EN ISO 8302	0,015 m ² K/W	0,010 m ² K/W
Slip resistance	DIN 51130	R10	
	EN ISO 13893	Class DS	
Sound reduction: impact sound	EN ISO 10140-3 EN ISO 717-2	2 dB	
Dimensional stability	EN ISO 23999	≤ 0,15 % - pass	
Light fastness	EN ISO 105-B02	> 6	
Static electrical propensity	EN 1815	antistatic (≤ 2 kV)	




GLUE DOWN 55

Technical data

luxury
vinyl flooring

05/2026

Composition

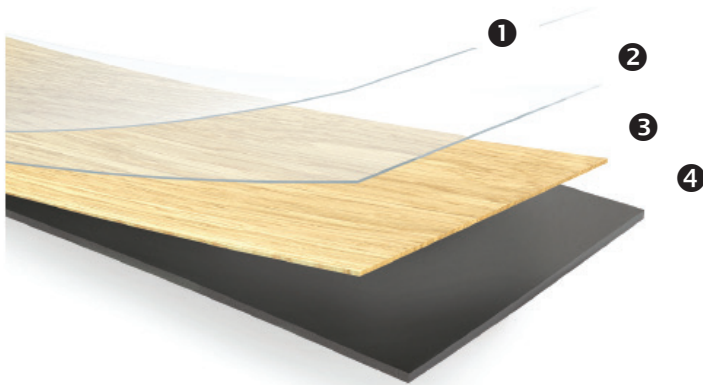

- ❶ Protective PU lacquer
- ❷ Wear layer 0,55 mm
- ❸ Decor layer
- ❹ Backing layer