

RIGID CLICK 30

Technical data

luxury
vinyl flooring

05/2026

	Contains	m ²	Gross Weight
1 pack rigid click 30 planks	8 planks	1,71 m ²	13,33 kg
1 pallet rigid click 30 planks (incl. pallet)	80 packs	136,76 m ²	1085,10 kg
1 pack rigid click 30 tiles	6 tiles	2,51 m ²	21,68 kg
1 pallet rigid click 30 tiles (incl. pallet)	40 packs	100,34 m ²	887,20 kg


Product specifications

	Norm	Rigid Click 30 planks / tiles
Dimensions	EN ISO 24342	1210 x 176,6 mm / 914,4 x 457,2 mm
Thickness of the wear layer	EN ISO 24340	0,30 mm
Embossing		wood & stone emboss
Total thickness	EN ISO 24346	5 mm (4+1)
Integrated underlay		yes (1 mm)
Locking system		2G
Bevel type		micro V4
Usage classification	EN ISO 16511	23/31
Residential warranty*		15 years
Commercial warranty*		3 years

*warranty conditions on www.luxuryvinylflooring.org

Test results

Underfloor heating	EN ISO 12524	suitable (detailed instructions on www.luxuryvinylflooring.org)
Castor chair	EN ISO 4918	pass
Fire resistance	EN ISO 13501-1	Bfl-s1
Chemical resistance	EN ISO 26987	OK
Residual indentation	EN ISO 24343-1	≤ 0,10 mm - pass
Thermal resistance	EN ISO 8302	0,035 m ² K/W
Slip resistance	DIN 51130	R10
	EN ISO 13893	Class DS
Sound reduction: impact sound	EN ISO 10140-3 EN ISO 717-2	19 dB
Dimensional stability	EN ISO 23999	≤ 0,15 % - pass
Lock strength	EN ISO 16511	> 1,5 kN/m - pass
Light fastness	EN ISO 105-B02	≥ 6 - pass
Static electrical propensity	EN 1815	antistatic (≤ 2 kV)




RIGID CLICK 30

Technical data

luxury
vinyl flooring

05/2026

Composition

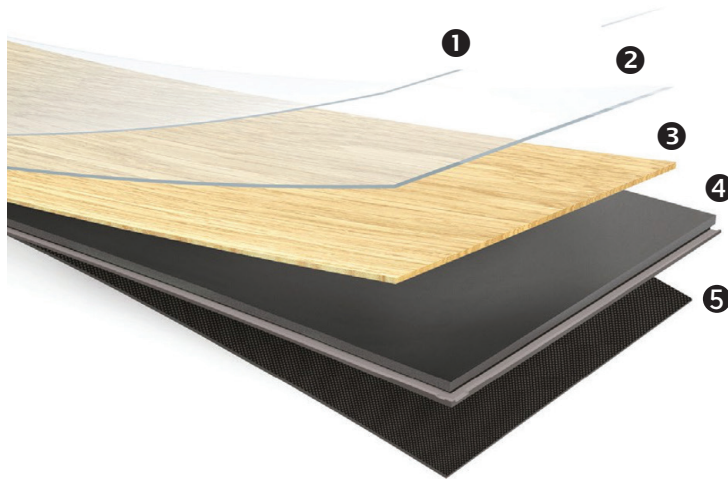

- ❶ Protective PU lacquer
- ❷ Wear layer 0,30 mm
- ❸ Decor layer
- ❹ Rigid board
- ❺ Integrated underlay (1 mm)